

PEARL²

LIVE ENCODING AT 4K




Switching Encoding Recording Streaming

Reliable, simple live streaming with Pearl-2's integrated live video production workflow. Manage your streaming, recording and live switching in one place with this easy to use video production system.



Capture 6 video sources

Output multiple streams

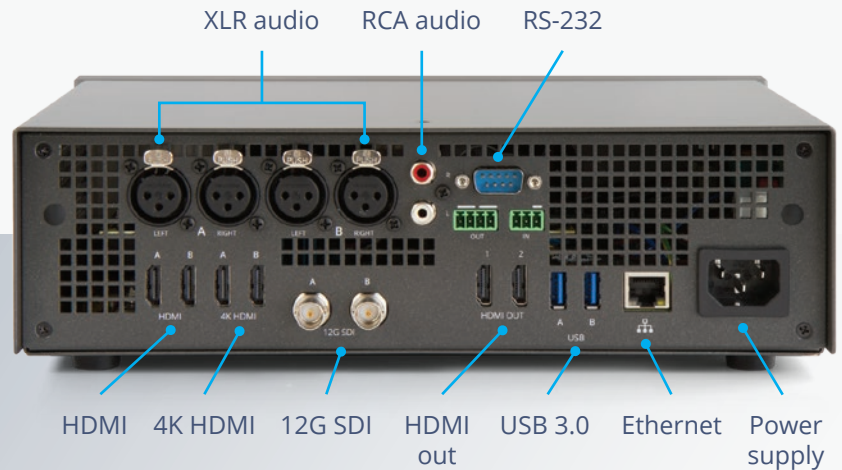



Stunning 4K video

Harness the power of Pearl-2's 6th generation Intel processor to capture stunning 4K video at 30 fps. Use Pearl-2's default hardware-accelerated H.264 encoding for maximum compatibility and performance or choose MPEG-4 or M-JPEG codecs.



Pro audio support

Capture embedded HDMI and SDI audio or use the XLR/RCA ports for professional level audio from mixing consoles and sound equipment. Built-in attenuation and gain adjustment mean you get perfect sound fidelity.

EPIPHAN LIVE

Simple to use monitoring and live switching between sources or layouts using Epiphan Live, a control interface designed for ease of use with touch screen devices.



Plug and play, or tweak to perfection

Let Pearl-2 set everything for you automatically, or use the web-based Admin panel to configure bitrate, frame size, layouts and more!



Output video for local displays

Show any source or program channel at front of house or on a larger confidence monitor at up to 4K using Pearl-2's HDMI output ports.

Keep your recordings safe

Hold hundreds of hours of HD recordings and configure automatic file transfer to a local USB drive or network drives.






Capture 6 video sources at once

Pearl-2 works with any video source from SD to 4K! Capture 4K from HDMI or SDI sources and up to 1080p from IP cameras over RTSP.

Stream to viewers everywhere

Send multiple, simultaneous streams out to CDNs or video portals. At the same time, use the built-in streaming server to stream locally to web browsers and set-top boxes.

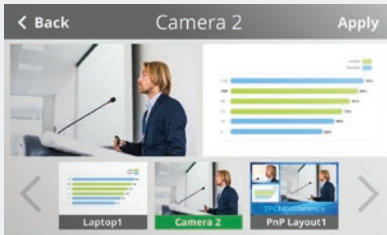

Switch video sources live

Use the touch screen or **Epiphan Live** to preview and change live content. See changes immediately in your video stream and via Pearl-2's video output ports.

Create custom layouts

Completely customizable, drag and drop layouts with cropping and image overlay support.



Video inputs	2 × HDMI™, 2 × 4K HDMI, 2 × 12G SDI
Audio inputs	2 × stereo XLR, RCA, SDI audio and HDMI audio
Video output	On-board touchscreen and 2 × 4K HDMI for video output
Video switching	During live streaming and recording via the touch screen or web UI
Video encoding	Codecs: H.264, MPEG-4, Motion JPEG
	Bitrate: 1 to 20 Mb/s
	Color resolution: 4:2:0
	Resolution: User-selectable up to 4K (3840 × 2160)
Audio encoding	MP3, PCM and AAC (sampling 16 - 48 kHz, bitrate up to 320 kbps)
Network	1 × 10/100/1000 Ethernet port (RJ45)
Storage	Local hard drive 512 GB SSD
	Local USB Automatic or manual copy via 3 USB 3.0 ports
	Network storage FTP server or FTP, SFTP, SCP, RSYNC, CIFS copy
Recording formats	AVI, MP4, MOV or MPEG-TS
Control	Web Admin panel, Epiphan Live portal, touch screen, comprehensive HTTP and RS-232 APIs
Product dimensions	11.81" x 9.45" x 3.54" (300 mm x 240 mm x 90 mm), 8.38 lbs (3.8 kg)

www.epiphan.com

Email: info@epiphan.com

North America +1-877-599-6581

International +1-613-599-6581

™ and © 2016 Epiphan Systems Inc. All rights reserved.

Epiphan, Epiphan Video, Epiphan Systems, its products names and logos are tradenames or trademarks of Epiphan Systems Inc. All other company, interface and product names and logos are trademarks or registered trademarks of their respective owners in certain countries. Product descriptions and specifications regarding the products in this document are subject to change without notice.